



5Dx0H\$Yx> @ >gÿ\$ \$•%aj

'59 0 Nm#%

'59 0 9DOYH 6HULHV

'LUHFW \$FWLQJ 5HOLHI "H#3QAE© \$QWL



0HWULF &DUWULGJH ©

&DYLWDWLRQ 9DOYHV

E



%Exp 6 \PERO

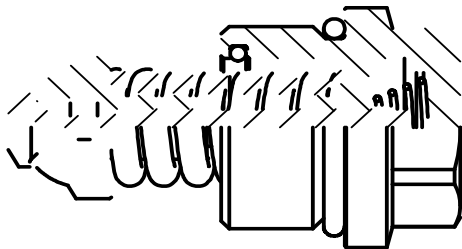

JWgr(šN™#C0•Y,P+5DZ7grPE%z #Ahygr%baCEa9<Ô(RbQN™,>(6b QTS 1FRi0xYâ04•DiD00y



3ò8jCë1™ 7HFKQLFDO)HDWXUHV

f—grPAa9B_*vExIb\$~/èPAa9N0-8\$ /WIOJ38f ÀGö"Ù>6@•%<8ffñGö ñFš-q%iî ¼^bZhh h
*~YÚhÔbo7jPAa9f2f~*vEx%pgRÂWò*vEx ½8{hnbZ h(1c9FšIJ0~0 f 8Â#"a' ½PE8öN™#C »
ÅKa-• ½\$y\$ F£F' /W\$ð]0- #I\$ð%€•%ajuSò ½%aa{Gö0«M™\$y\$ Tu(f8r*™Se E D U ¼


Poppet is hardened and ground to guarantee minimal wear and to extend service life. All external surfaces are zinc plated and corrosion-proof. All valve parts are

PDGH RI KLJK VWUHQJWK VWHHO & RPSDFW VLJH 3UHV VVXU
IDFWRU\ DQG FDQQRW EH FKDQJHG 2SWLRQDO VSULQJ UD






5D,Æ(p & D Y L W \

VH054


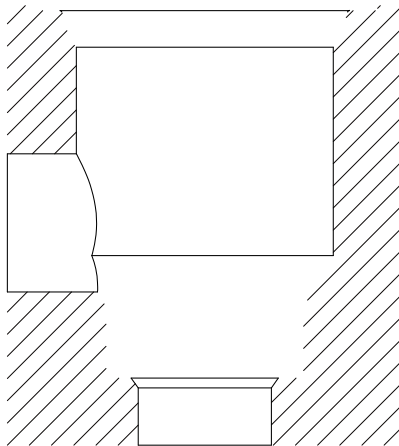




Cë1™8dP1 3HUIRUPDQFH

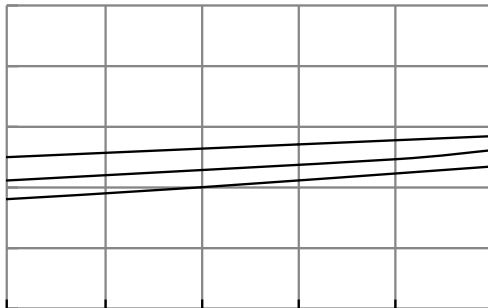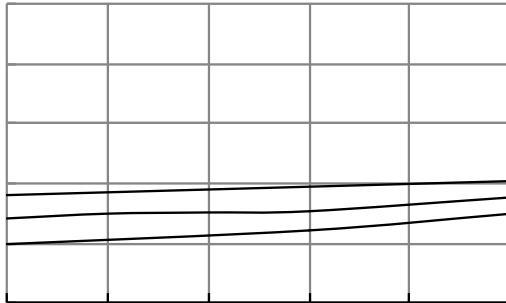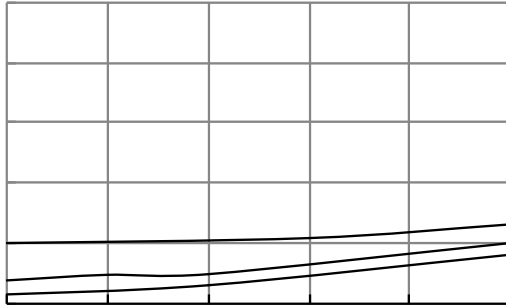

>Z2•Çë1™8dP1(p7°J¬#l ø0«M™Gö=A œ!Á/ a{4[Gö>³cA*vExRo\$ %{\\$>+?) ¬ ‹%pN0 ¬ F V W
7h]°0Ç ø S 4 8dP1 ¼
127(7KH SHUIRUPDQFH FKDUW LOOXVWUDWHV ARZ KDQGOLQJ FDSDFLW
DUH UHFRUGHG DW 72LO r & DQG F6W

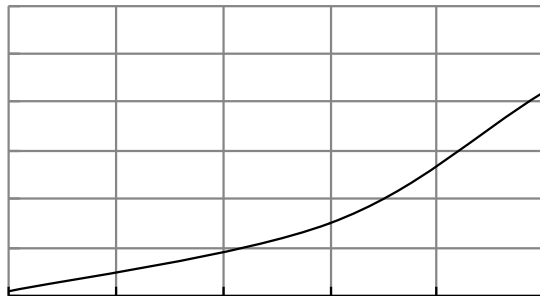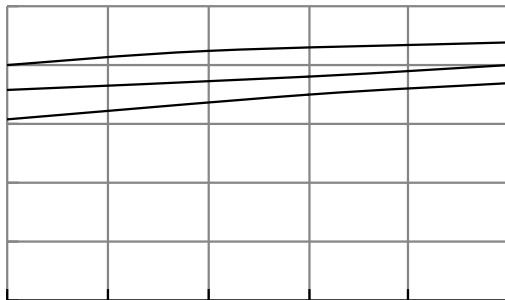

HT

9 Nm#%Y,P+5DZ7gr &39©8ž | @ >³gr
9 VHULHV FDUWULGJH YDOYH S|U ReBeK VaWesV SHFL@FDWLRQ



3ò8j;%46âYÚ 7HFKQLFDO 'DWD

■]^TMP^%i 2UGHULQJ FRGH